


PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum



General Description (概述)

YSO171PS is a programmable spread spectrum crystal oscillator based on PLL technology, with its output frequency factory-programmed between 1MHz and 200MHz to meet customer specifications. YSO171PS supports both center and down spread modulation modes with spread spectrum widths from $\pm 0.125\%$ to $\pm 2\%$. The use of a dedicated programmer allows us to service requests with very fast lead times.



Features (产品特性)

- Available with any frequency from 1MHz to 200MHz
- Spread spectrum widths from $\pm 0.125\%$ to $\pm 2\%$
- 1.8 V to 3.3V VDD supply operation
- CMOS Output
- Operating temperature range: -40°C to $+85^{\circ}\text{C}$ (industrial); extended range up to $+105^{\circ}\text{C}$ available
- Low Power Consumption: 3.4 mA typical.
- EMI Reduction: Minimizes electromagnetic radiation and susceptibility to interference
- Package Options: Available in 4pin Plastic Package : 3.2*2.5mm, 2.5*2.0mm

Applications (应用领域)

- Wireless Communication Equipment
- Computing and Networking Equipment
- Industrial Control Systems
- Medical Devices
- Automotive Electronic Systems

PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum



LIST

General Description	1
Features	1
Applications	1
1 Specifications	1
Table 1 Electrical Characteristic	1
Table 2 Absolute Maximum Ratings	2
Table 3 Function and Configuration	2
1.1 Power Consumption Characteristics	2
Figure 1 Power Consumption Chart	2
1.2 Modulation Depth Testing	3
Figure 2 Spread Spectrum Crystal Oscillator Modulation Depth Test Chart	3
2 Pin Dimension	3
Table 4 Pin Description	3
Figure 3 Pin Assignments	3
3 Dimensions and Recommended Land Pattern	4
4 Marking information	4
5 Inside Structure	5
Table 5 Internal Structure Diagram	5
Figure 4 Materials of Internal Components	5
6 Test Circuit	5
7 Reflow profile	6
Figure 5. Reflow Profile	6
8 Taping Specification	6
9 Notice	7

PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum



1 Specifications (规格参数)

Table 1 Electrical Characteristic

Item	Min	Typ	Max	Remarks
Nominal Frequency Range 额定频率范围	1MHz ~ 200MHz			
Supply Voltage 电源电压	1.62V	1.8V	1.98V	Voltage Tolerance: ±10%
	2.25V	2.5V	2.75V	
	2.97V	3.3V	3.63V	
Frequency Tolerance 频率偏差	±25ppm, ±50ppm, or specify			
Operating Temperature 工作温度	-40 ~+ 85°C, or specify			
Input Voltage 输入电压	VIH=70% VDD Min VIL=30%VDD Max			OE terminal
Output Type 输出方式	CMOS			
Output Load 输出负载	15pF			
Output voltage (DC characteristics) 输出电压	VOH	90% VCC		OE terminal
	VOL		10% VCC	
Disable Time 禁用时间			1 μs	Measured from the time OE pin crosses 30 % VCC
Enable Time 使能时间			1 μs	Measured from the time OE pin crosses 70 % VCC
Start-up Time 启动时间			3.0ms	Measured from the time VCC reaches its rated minimum value, 1.62 V
Current Consumption 消耗电流	VCC=1.8V		6.0mA	@170MHz
	VCC=2.5V		6.9mA	
	VCC=3.3V		8.3mA	
Output disable current 输出禁用电流	VCC=1.8V		3.4mA	
	VCC=2.5V		3.5mA	
	VCC=3.3V		3.7mA	
Rise Time/Fall Time 上升/下降时间			3ns Max (f0>40MHz) 6ns Max (f0≤40MHz)	
Duty Cycle 占空比	45%		55%	50 % VCC Level
Frequency Aging 老化 (at 25°C)			±5 ppm / year	
ESD-Human Body Model 人体静电放电电模型	2000V			
ESD-Machine Model 机器静电放电电模型	250V			
ESD-Charged Device Model 充电器件静电放电电模型	750V			

PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum



Table 2 Absolute Maximum Ratings

Item	Min	Typ	Max	Remarks
Maximum Junction Temperature in Operation 最大工作温度	-40°C		+125°C	
Storage Temperature 储存温度	-40°C		+125°C	

Table 3 Function and Configuration

Item	Min	Typ	Max	Remarks
Enable Function 使能功能	70% of VDD			
Disable Function 禁用功能			30% of VDD	
Spread Type 展频方式	Center Spread 中心展频	$\pm 0.125\%$ (C0.125) to $\pm 2.0\%$ (C2.0) in $\pm 0.125\%$ steps		
	Down Spread 向下展频	-0.25% (D0.25) to -4.0% (D4.0) in 0.25% steps		
Modulation Frequency 调制频率	25.4kHz (Default), 12.7kHz, 8.5kHz, 6.3kHz			

1.1 Power Consumption Characteristics (功耗特性)

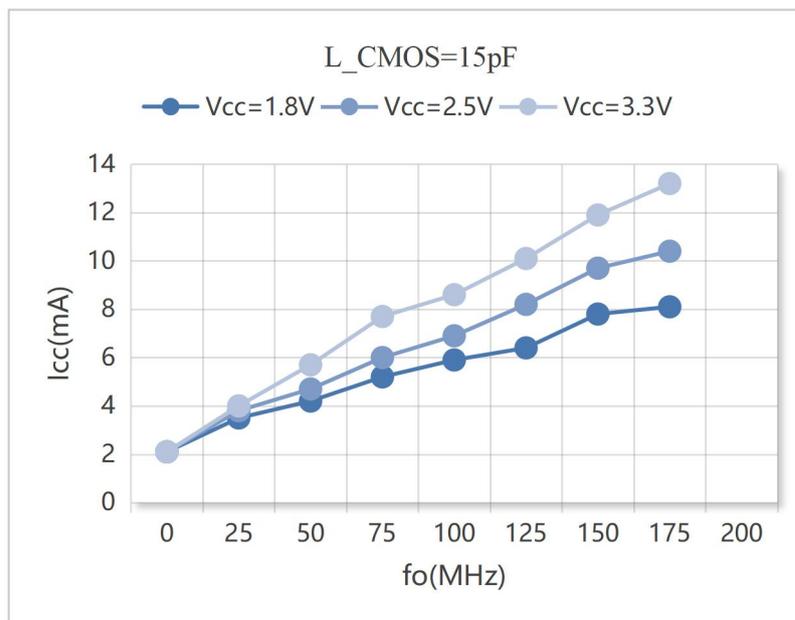


Figure 1 Power Consumption Chart

PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum



1.2 Modulation Depth Testing (展频调制深度测试)

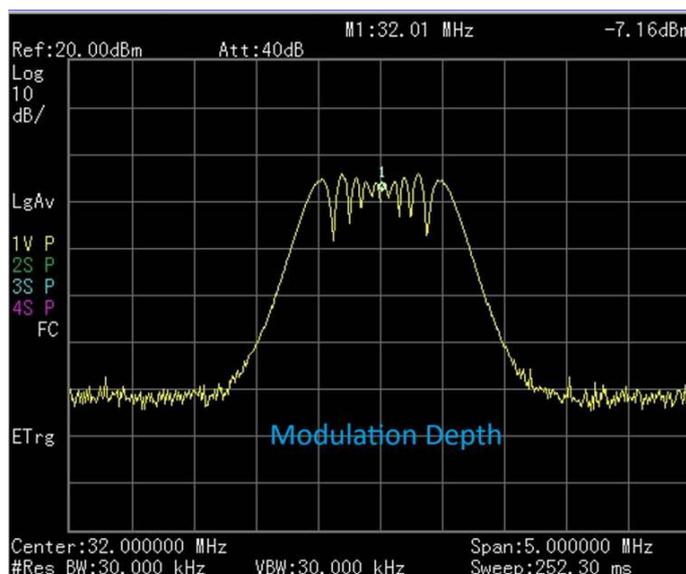


Figure 2 Spread Spectrum Crystal Oscillator Modulation Depth Test Chart @32MHz

2 Pin Dimension (脚位尺寸)

Table 4 Pin Description

Pin	Name	Function	
1	OE	Output enable	High: Specified frequency output from OUT pin Low: Out pin is low (weak pull down), only output driver is disabled
2	GND	Ground	
3	OUT	Clock output	
4	VDD	Power supply	

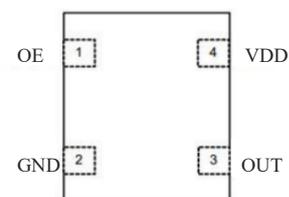



Figure 3 Pin Assignments

PROGRAMMABLE CRYSTAL OSCILLATOR


YSO171PS Spread Spectrum



3 Dimensions and Recommended Land Pattern (外观尺寸及推荐焊盘)

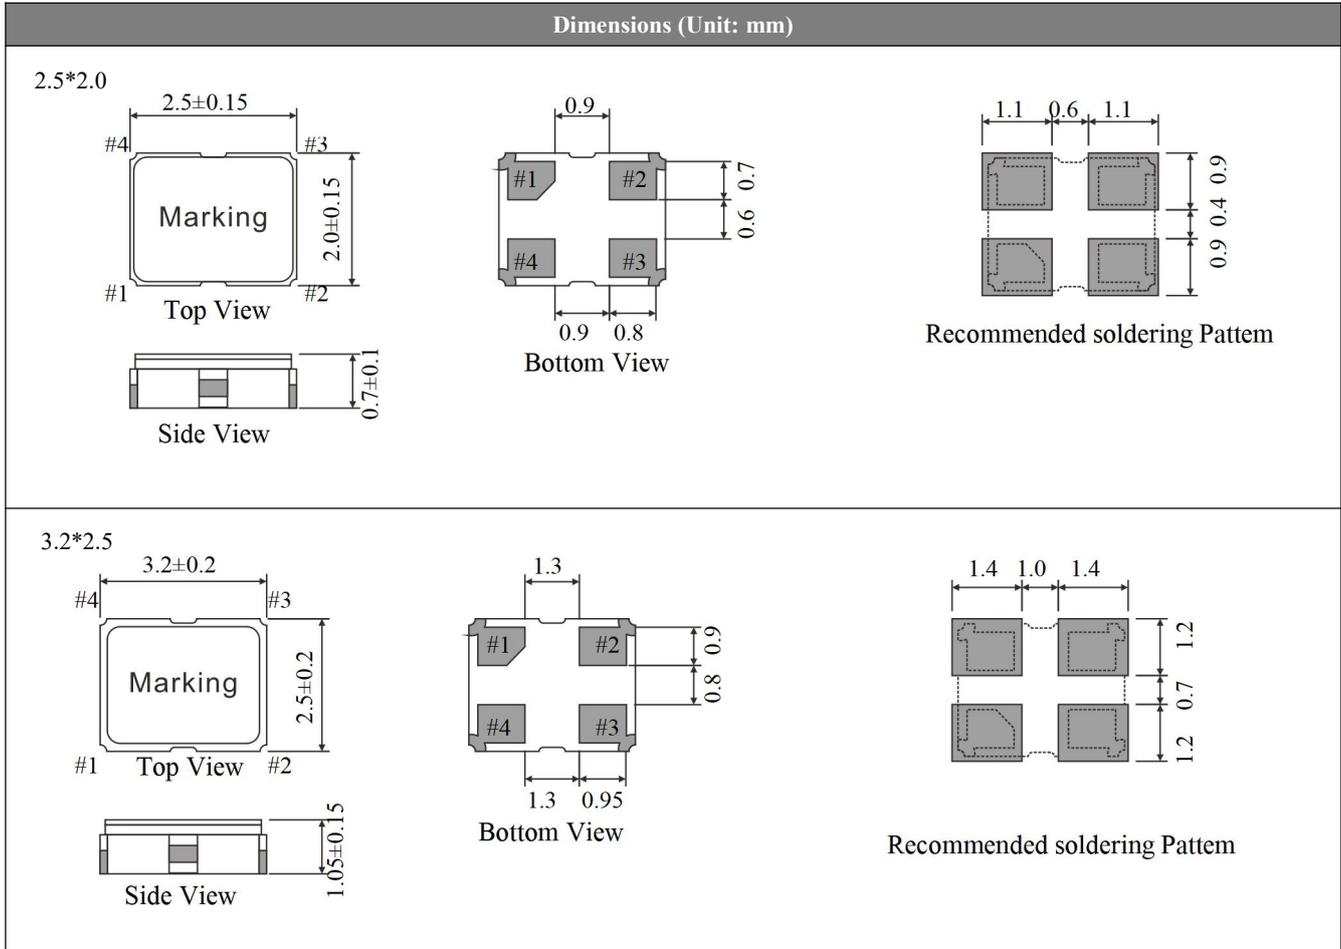

4 Marking information (丝印说明)

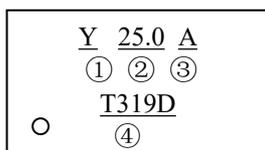

① YangXing LOGO
② Frequency
③ Spread detail
④ Lot number

PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum



5 Inside Structure (内部结构)


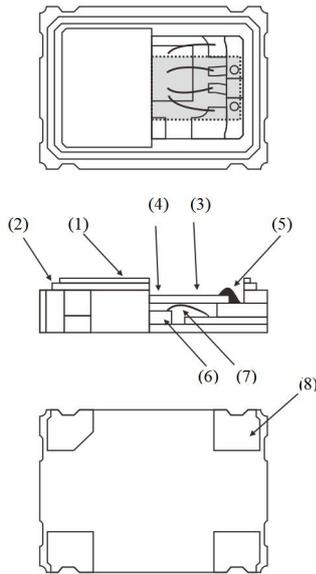


Table 5. Materials of Internal Components

No.	Name	Material
(1)	Can	Fe-Co-Ni
(2)	Base	Ceramic
(3)	Blank	Quartz
(4)	Electrode	Au over Cr
(5)	Adhesive	Epoxy Conductive Adhesive (Silver-filled)
(6)	IC	Slilcon
(7)	Wire	Au
(8)	Soldering Pads	Au plated

6 Test Circuit (测试电路)

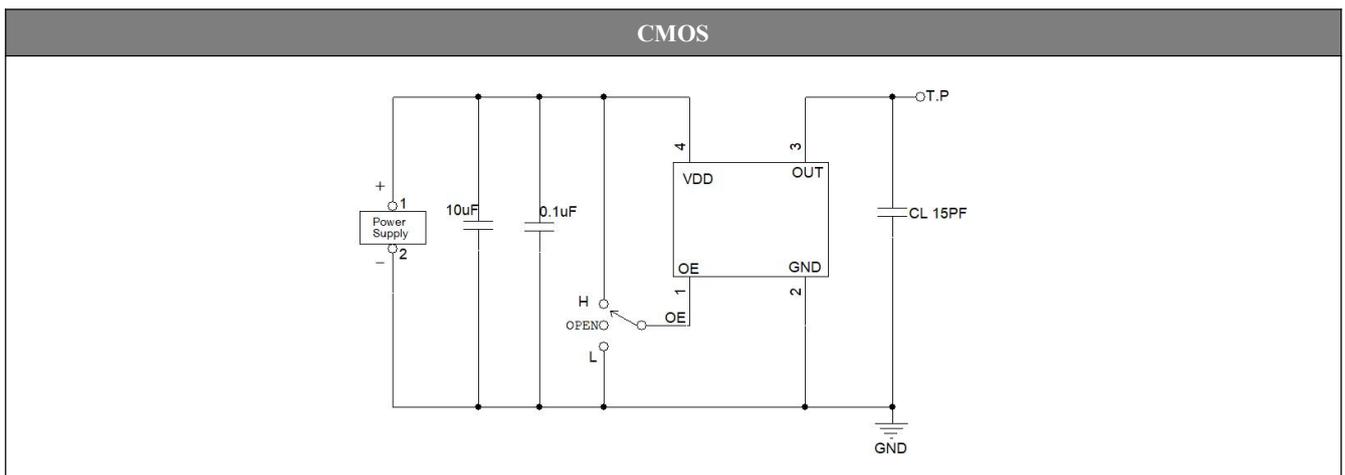


PROGRAMMABLE CRYSTAL OSCILLATOR

YSO171PS Spread Spectrum




7 Reflow profile (回流焊)

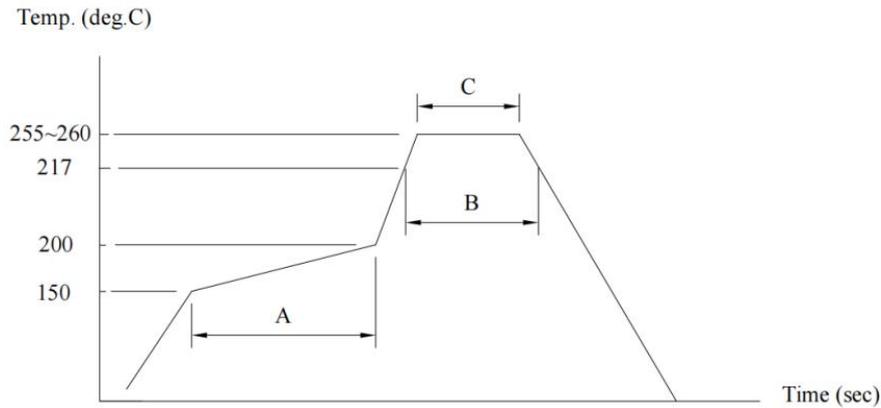

- (A)→Preheating area : 150~200°C, 60~120sec.
- (B)→Heating area : 217°C, 60~150sec.
- (C)→Peak temperature : 255~260°C, 30sec. Max.
- Ramp-up rate (217→260°C) : 3°C/sec. Max.
- Ramp-down rate (260→217°C) : 6°C/sec. Max.
- Time 25°C→260°C : 480sec. Max.
- Moisture Sensitivity Level : Level1

8 Taping Specification (载带规格) (Unit: mm)

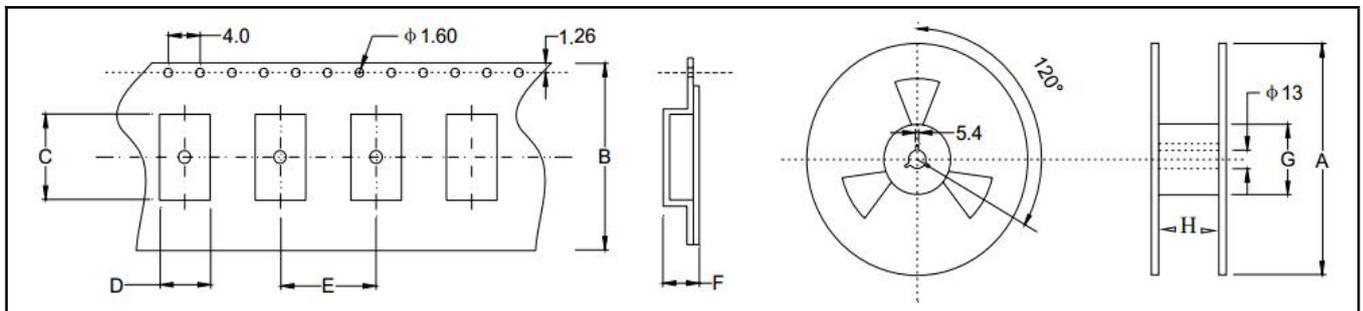

Size	A	B	C	D	E	F	G	H	Pcs/reel
SMD-2520	180±2.0	8.0±0.3	2.70±0.1	2.25±0.1	4.0±0.1	0.8±0.1	61.0±1.0	9.5±0.5	3000
SMD-3225	180±2.0	8.0±0.3	3.40±0.1	2.70±0.1	4.0±0.1	1.40±0.1	61.0±1.0	9.5±0.5	3000

PROGRAMMABLE CRYSTAL OSCILLATOR YSO171PS Spread Spectrum



9 Notice (注意)

包装 PACKING

包装方式应符合运输和装卸要求，特殊包装须经双方认可。

Packing must prevent damage during transportation and handing. Specific method will be settled by mutual Agreement.

对环境影响 INFLUENCE TO ENVIRONMENT

本产品在生产过程中不使用 ODS I，对臭氧层无破坏。

This product doesn't use the class I ODS at any of production process.

生产厂家 MANUFACTURER

公司名称：深圳扬兴科技有限公司

Shenzhen YangXing Technology Co., Ltd.

其它 OTHERS

1.如果您对本公司产品规格书有疑问或书中未列出，请与我方联系，协商解决及改进。

If you have some doubt or unknowing about this specification, Please contact us for settlement or development.

2.我们按照产品规格书要求保证晶体品质，若客户要求具体数据，我们可提供。

We guarantee that quartz crystal unit satisfies this specification, If you need the data, we will provide it.

3.如需应用于超声波环境下，请与我们联系。

For application in ultrasonic environment, please contact us.

4.变更与联络 (MODIFY AND CONTACT)

本产品在设计、工艺、材料、生产厂所、关键设备、操作人员等影响产品质量的因素有变更时，应事先提供更改后的产品并经过质量认可后，方可大批量供货。

When the quality is changed due to the changes of the design, technology, material, manufacture place, main equipment and workers, we will first supply the modified products and obtain approval from you, then start to supply mass production.

5.售前售后服务 (AFTER SALE SERVICE)

若在生产过程中遇到不良品，本公司负责调换，并及时提交不良品的分析及改进措施报告经认可。

If the defection product was found in the production process, we will exchange and provide the improving measures in time.

此规格书仅供参考。若有需要，请与我方案要正式承认书作为物料承认及质量判定依据。

This specification is for reference only. If needed, please request a formal letter of acknowledgment from our side to serve as the basis for material acknowledgment and quality judgment.